

SCHOTT Xensation™ Aluminosilicate Cover Glass

Glass Fabrication




Coating Deposition



CNC Machining



Strengthening - Chemical & Heat

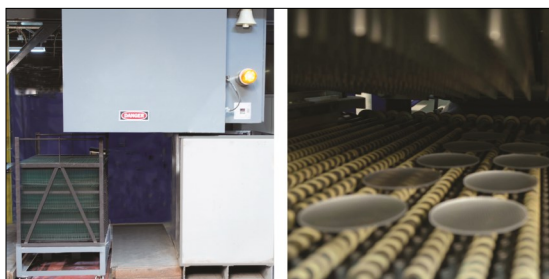

Screen Printing of Graphics



Abrisa Technologies, a member of HEF Photonics, is a globally recognized technology glass fabrication and optical thin film coating company with expertise in high volume manufacturing and engineering capabilities, delivering Total Solutions that provide excellent performance, fitness-for-use and economies of scale.

Our US based, state-of-the-art ISO 9001:2015 and ITAR registered facilities include Abrisa Industrial Glass in Santa Paula, CA and ZC&R Coatings for Optics in Torrance CA. These two divisions produce solutions from cut-to-order coated glass components to custom complex and ready-to-install fabricated, strengthened, optically coated, electronically enabled and branded sub-assemblies.

Our Total Solutions serve a variety of markets including Micro-Electronics, Defense and Avionics, Display, Industrial Automation, Optical Sensors, Imaging, Photonics, Medical & Dental, Life Science and more.



Abrisa Industrial Glass
200 South Hallock Drive
Santa Paula, CA 93060

ZC&R Coatings for Optics
1401 Abalone Avenue
Torrance, CA 90501

(877) 622-7472

www.abrisatechnologies.com

info@abrisatechnologies.com

SX 10_22



Your Total Solution Partner

SCHOTT Xensation™ Aluminosilicate Cover Glass

SCHOTT Xensation™ Cover - High Ion-Exchange (HIE™) Aluminosilicate glass for capacitive touch technologies, Xensation™ Cover is a high-quality Aluminosilicate glass with outstanding resistance to breakage and scratches for capacitive touch technologies.

Key-Benefits of SCHOTT Xensation™ Cover:

- SCHOTT's unique microfloat manufacturing process gives the Xensation™ Cover aluminosilicate glass its excellent sheet quality.
- Due to the impressively high Compressive Stress (CS) and Depth of Layer (DoL), Xensation™ Cover offers outstanding strength.
- The robust nature of Xensation™ Cover results in very stable CS, DoL and overall strength even under varying chemical strengthening conditions. This enables a broad process window.
- Xensation™ Cover maintains its high strength even when process optimization calls for shorter ion exchange. Xensation™ Cover is available in a wide range of thicknesses with tight tolerances.

Thermal Properties:

Thermal Conductivity λ (25 °C)	0.96 W/(m·K)
Specific Heat Capacity C_p (20 °C; 100 °C)	0.84 KJ/(Kg·K)
Coefficient of Mean Linear Thermal Expansion α (20 °C; 300 °C)	$8.8 \cdot 10^{-6} K^{-1}$ *
Transformation Point T_g	615 °C*
Annealing Point (10^{13} dPas)	635 °C
Softening Point ($10^{7.6}$ dPas)	880 °C
Working Point (10^4 dPas)	1265 °C

*cooled according to DIN

Chemical Properties:

Hydrolytic Resistance	DIN ISO 719	Class HGB 1
Acid Resistance	DIN 12116	Class S 4
Alkali Resistance	DIN ISO 695	Class A 1

Mechanical Properties:

Density	2.477 g/cm ³ *
Young's Modulus E	74 kN/mm ²
Poisson's Ratio	0.215
Shear Modulus	30 kN/mm ²
Knoop Hardness HK _{0.1/20}	
Non-strengthened	534
Strengthened	639
Vickers Hardness HV _{0.2/20}	
Non-strengthened	617
Strengthened	681

*cooled according to DIN

Chemical Strengthening:

Compressive Stress	capable > 900 MPa
Depth of Layer	capable > 50 μ m
4-Point Bending Strength	cap. > 800 MPa

Optical Properties:

Refractive Index at	588 nm (n_d)	633 nm	780 nm
Core Glass	1.508	1.506	1.502
Compression Layer			
KNO ₃ pure	1.516	1.514	1.510
Transmittance τ (Glass Thickness 0.7mm)			
840 nm			> 91.5 %
560 nm			> 91.5 %
380 nm			> 90 %
Photoelastic Constant			29.2 nm/cm/MPa

Electrical Properties:

Frequency	Dielectric Constant	Loss Tangent
MHz	ϵ'	$\tan\delta$
1	7.74	0.011
54	7.49	0.008
480	7.40	0.009
825	7.38	0.010
912	7.38	0.010
1977	7.35	0.012
2170	7.35	0.012
2986	7.34	0.012
Electric Volume Resistivity ρ_D for A.C. at 50Hz		
$v = 250$ °C		$1.5 \cdot 10^6 \Omega \cdot \text{cm}$
$v = 350$ °C		$8.9 \cdot 10^4 \Omega \cdot \text{cm}$

*These values are no guaranteed data - for customer orientation only.

Sheet Dimensions:

Sheet Size: 1150 x 950 mm & 475 x 575 mm
Thickness Range: 0.55 to 2 mm stocked

Abrisa Technologies • 200 South Hallock Drive, Santa Paula, CA 93060 • (877) 622-7472
www.abrisatechnologies.com • info@abrisatechnologies.com

